


innovative · customer-oriented · flexible · service-oriented



Your partner for wood working industries

Drum screens



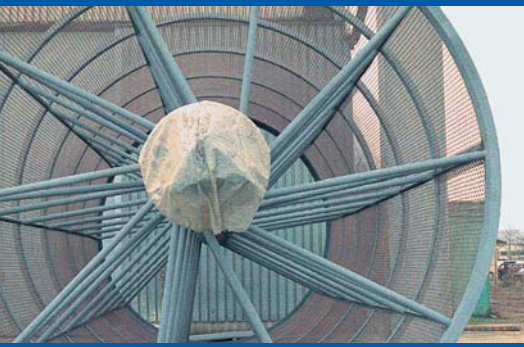

Technical specifications:

Type of machine	Diameter of drum mm	Length of drum mm	Fractions (max.)	Installed power	Weight kg
TT 6 x 15	1,830	4,680	3	7.5	8,300
TT 8 x 20	2,440	6,180	3	11.0	15,000
TT 10 x 30	3,050	9,180	3	11.0	21,700
TT 12 x 30	3,660	9,180	3	15.0	28,000
TT 14 x 30	4,270	9,180	3	15.0	30,000
TT 14 x 35	4,270	10,710	3	18.5	32,000

Range of applications:

Grading and screening of both green and dry material.

Supply material:

Strands, chips, flakes, sawdust, extremely long flakes.

Mode of operation:

Due to its large surface, the drum with its special lining assures precise grading as well as gentle screening. The screening operation can be effected separately into fine material (dust), accepted material as well as into extremely long flakes.

Features:

The whole screen is characterised by an adjustable design. The screen lining is inserted into a frame which is easy to handle. This results in considerably reduced idle times of machines when the screen lining is to be exchanged. The screening operation yields up to three different fractions.