
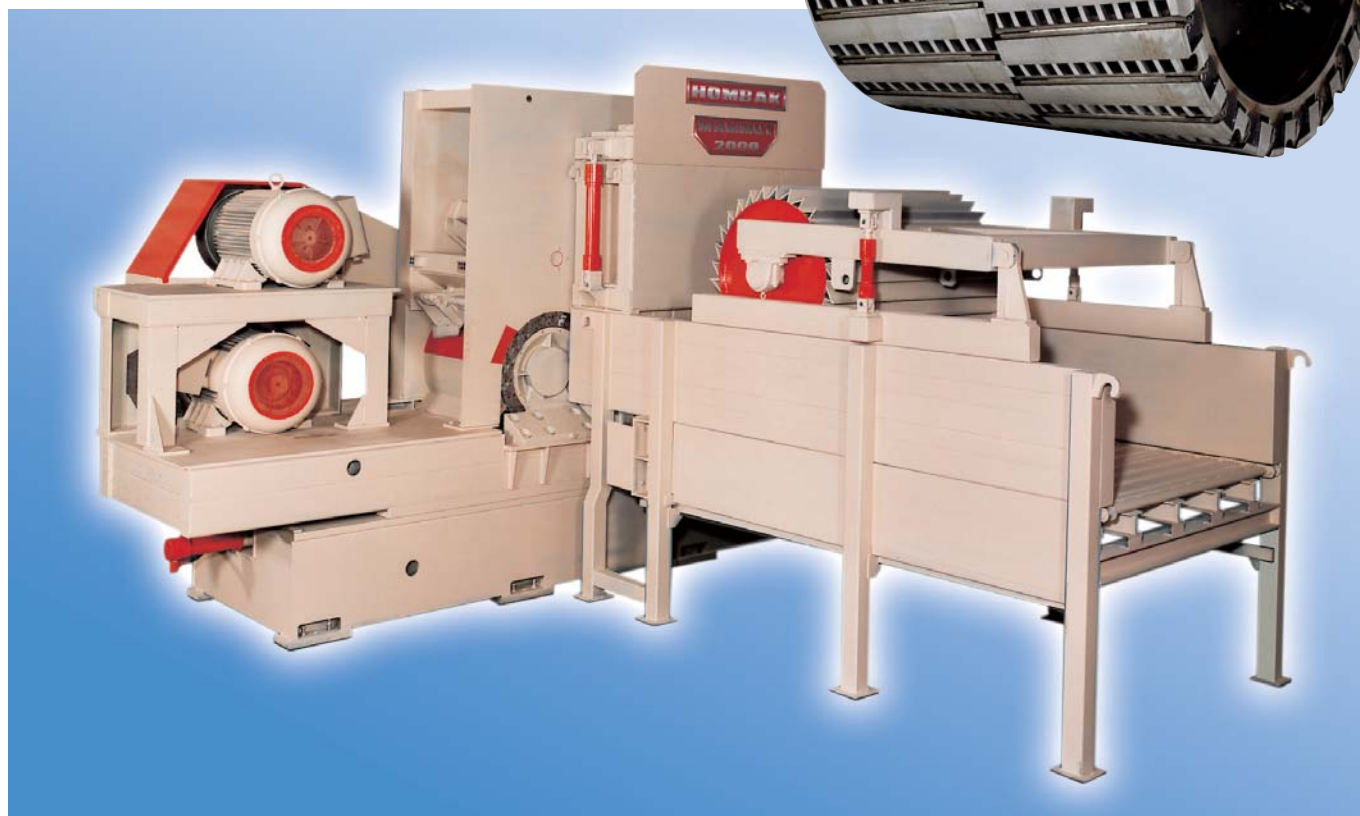


innovative · customer-oriented · flexible · service-oriented

**hombak**  
Maschinen- und Anlagenbau

Your partner for wood working industries

## Universal drum flakers

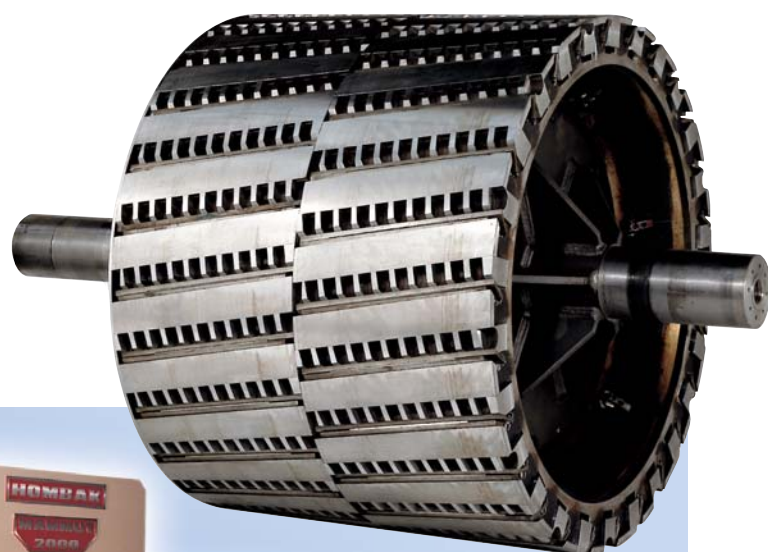



## Technical specifications:

Type of machine	Diameter of cutterhead mm	Number of cutterhead segments	Cutting length mm	Number of knives	Power of cutterhead kW approx.	Width of feeding trough mm	Installed power kW approx.	Height of trough mm
MU 64/1.50.8	620	2	640	16	90	1,500	101	500
MU 64/1.50.16	620	2	640	32	200	1,500	213	500
MU 74/2.60.16	750	2	740	32	400	1,500	437	600
MU 74/2.60.18	750	2	740	36	250	1,500	287	600
MU 112/2.80.16	1,000	2	1,120	32	2 x 250	1,500	590	800
MU 112/2.80.24	1,000	2	1,120	48	400	1,500	475	800
MU 112/3.75.16	1,000	2	1,120	32	2 x 250	2,000	590	750
MU 112/3.75.24	1,000	2	1,120	48	400	2,000	475	750
MU 112/4.120.26	1,400	2	1,120	52	2 x 450	2,000	990	1,200
MU 166/1.75.20	1,000	3	1,660	60	2 x 450	2,000	990	750
MU 166/4.120.26	1,400	3	1,660	78	2 x 560	2,000	1,210	1,200

## Range of applications:

The universal drum flaker allows flaking of very different types of wood in a very economical and power-saving manner.

## Supply material:

Logs of random lengths, cores, slabs and edgings.

## Mode of operation:

This type of drum flaker works discontinuously.

## Features:

During the flaking operation the wood is safely fixed. The cutterhead is readily accessible. As soon as the clamping wedges have been depressed, the knives can be easily removed from the cutterhead – without any additional tools. This machine has proved its worth for the production of flakes with very narrow thickness tolerances and very low percentage of fines and splinters.